

HX1000A L

Crawler Excavators



Head Office(Sales Office)
11F, GLOBAL R&D CENTER, 477 BUNDANG SUSEO-RO, BUNDANG-GU, SEONGNAM-SI, GYEONGGI-DO, 13553, KOREA

PLEASE CONTACT

Rated power
629 hp (469 kW) @ 2,000 rpm

Operating weight
100.4t

Bucket capacity
5.4 ~ 6.8 m³

HYUNDAI HX1000A L CRAWLER EXCAVATOR

MADE FOR THE TOUGHEST APPLICATIONS

Lift your business to the next level with the HX1000A L HYUNDAI excavator.

Strong undercarriage, and the highest engine power and hydraulic flow in the market, with total control of the fuel consumption, to offer the lowest possible cost per ton.



* Photo may include optional equipment.

WHAT'S NEWEST AND BEST

HX1000A_L

HIGH PRODUCTIVITY AND LOW COST OF OWNERSHIP

Delivers higher productivity and reduced fuel consumption in an efficient and comfortable work environment.

RELIABILITY

Designed for the toughest applications and the most abrasive materials.

SAFETY


Your safety is our priority: 360° camera system, large side mirrors, powerful LED work lights, anti-slip steps and platforms, guard rails on upper structure.

MASS EXCAVATION

2 Heavy Duty (HD) front combinations available to match various conditions. Mass excavation front with large bucket size or heavy-duty fronts when long reach is needed.

SWING BEARINGS

Unique design of crossed bearings, for better stress distribution, and increased lifetime.

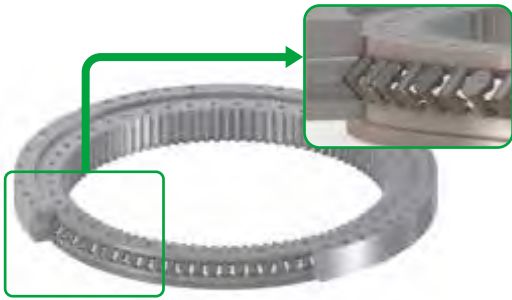

UNDERCARRIAGE DURABILITY

Heavy-duty undercarriage, with large rollers and sprocket, enhanced frame for the toughest applications

EASY MAINTENANCE

Automatic greasing system as standard, all filters easily accessible, compressor with air gun as option, everything designed for easy maintenance.

ADVANCED FILTRATION

Highest efficiency filters & cleaners remove water, dust & particles to protect your investment optimally.

COMFORT

One of the most spacious cabs in the market, with low noise & vibration levels and excellent all-round visibility. Fully adjustable heated air-suspension seat, air conditioning with climate control as standard.

OPERATE AT EASE

All important information is at your fingertips with the new easy-to-use 8" touch screen. Exclusive jog shuttle switch, 4 work & 4 power modes, proportional control.

ENGINE

Exceptionally powerful – with high torque at low revs – the Perkins 2806J engine combines reliability and low environmental impact. This Stage V compliant 6-cylinder engine delivers 469 kW at 2000 rpm.


EXCELLENT FUEL EFFICIENCY

The Smart Power Control (SPC) system increases fuel efficiency by adjusting the power to meet the application's needs. The system delivers the exact amount of oil needed to avoid any loss of energy.



* Photo may include optional equipment.

THE BEST PRODUCTIVITY AND FUEL EFFICIENCY

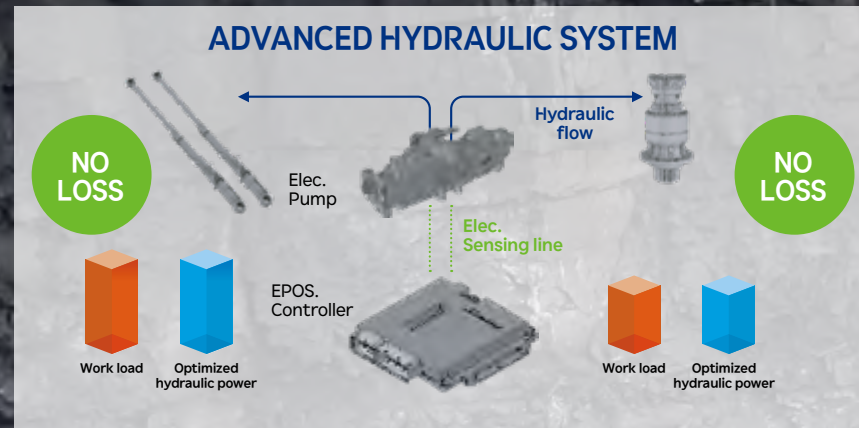

* Photo may include optional equipment.

The power to raise productivity

- The HX1000AL is equipped with the latest generation of Perkins engine
- Stage V compliant, this engine boasts extremely low emissions because reducing our environmental impact is paramount to us
- Exhaust gases are purified by Selective Catalytic Reduction (SCR) technology, a Diesel Oxidation Catalyst (DOC) and a Diesel Particulate Filter (DPF)



Efficient Fuel Management

- Choice of 4 power modes and 4 working modes guarantees optimum performance in all conditions
- Smart Power Control (SPC3) system: reduces engine speed and adjusts pump torque according to work conditions. The system automatically adjusts engine power and hydraulic output to improve fuel efficiency and reduce emissions. 2 systems (Variable Speed Control and Pump Torque Control) work together to improve efficiency while maintaining productivity.
- Engine auto-shut-off: shuts down the engine after the machine has been idling for a specified time. The operator can set the delay before shut-off via the touchscreen

Asymmetric Turbocharger

High-efficiency asymmetric turbocharger uses a design with 2 different sized scrolls to stream exhaust across the turbine wheel at different velocities.

The most Advanced Hydraulic System

This new electronic main pump accurately calculates the amount of pump flow required for each actuator, thereby maximizing productivity (faster operation) and avoiding unnecessary fuel loss.

NEW EXTERIOR DESIGN FOR ROBUSTNESS AND SAFETY

QUALITY-PROVEN MAIN COMPONENTS

Manufactured with the finest quality main components customized precisely for large equipment, this new machine offers Best-in-Class power and durability.

STRUCTURE

HYUNDAI offers a whole new structure designed specifically for mining operations, keeping your excavator running at all times in rugged harsh environments.

HEAVY-DUTY FRONT

The boom and arm have been specially developed for the toughest applications, such as quarrying or mass excavation, which considerably enhances the overall durability of the machine.

CROSSED ROLLER SWING BEARINGS

Unique crossed bearing design provides longer lifetime by distributing stress more evenly.

UNDERCARRIAGE

Our heavy-duty undercarriage further increases the durability of your machine.

HEAVY-DUTY SPROCKET

Our heavy-duty sprocket further increases your machine's durability.

BOOM

- Boom foot design to increase the pin strength and decrease one-sided wear of pin.
- Flat steel plate for dispersing machine stress.
- Welding design to increase welding part lifetime.
- Inner reinforced plate changed to disperse stress.

ARM

- Bottom steel plate to increase strength of arm structure.
- Arm center boss to lower stress.
- Arm welding design to decrease stress.



* Photo may include optional equipment.

RELIABILITY

In your profession, you need equipment you can depend on. At HYUNDAI, we put durability and reliability at the core of our machines' development. Our materials and structures undergo stringent testing for strength and resilience under the most extreme conditions.



Protected hydraulic system



Heavy-duty under cover




Frame



Crossed roller swing bearings



Undercarriage

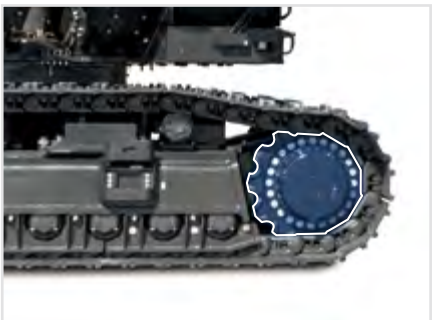

Heavy-duty sprocket

1. 8" touch screen
2. Cup holder
3. Joysticks and switches are integrated in adjustable control consoles
4. Improved visibility on the bottom right
5. Separate seat height adjustment lever and cushion tilting function
6. Straight ergonomic pedals
7. Flat, spacious, easy-to-clean floor



* Photo may include optional equipment.

EASY CONTROL

BEST-IN-CLASS OPERATOR ENVIRONMENT

The HX1000AL is designed to provide you with the best possible working conditions. The sophisticated state-of-the-art cab is pressurized and compliant with level 2 FOPS protection when equipped with FOPS guard for your safety. A high-quality heated seat with air suspension provides maximum operator comfort.

CAB SUSPENSION

The cab's suspension system (CabSus mount) dampens vibrations and provides outstanding protection against impact. This system absorbs shocks and vibrations much more effectively than a conventional silentblock suspension system.

HYUNDAI SMART TOUCH

The wide 8" touchscreen provides easy scrolling through the different menus, including power settings and auxiliary hydraulics settings. It also allows you to connect a Bluetooth device or listen to your favorite radio station.

360° ALL-AROUND VIEW CAMERA (AVM) SYSTEM

The 360° camera system gives you full view of the machine's surroundings.

HYUNDAI SMART KEY

We bring automotive standards and comfort to construction machinery

- Search function
- Coming/leaving home light function
- Remote door opening
- Keyless engine start

ERGONOMICALLY DESIGNED PEDALS

Ergonomically designed travel pedals placed in the middle. Pedal angle adjusted to relieve pressure on ankle and joints, reducing fatigue and lightening the operator's load.



COMFORTABLE OPERATION

The ergonomic controls and the easy-to-view color monitor place the machine firmly in your hands.



1. HYUNDAI Smart Key
2. Shear buttons
3. Breaker/booster button
4. Starter switch (Start/Stop button)
5. Engine speed control dial
6. Travel speed selector switch
7. Light switch
8. Cab work light switch
9. After-treatment system switch
10. Bluetooth control panel
11. Air conditioning and heating control panel

* Photo may include optional equipment.

DYNAMIC POWER MANAGEMENT

- Automatic travel speed range selection (slow/fast)
- A one-touch deceleration button immediately reduces engine speed to low idle
- Auto-idling starts 4 seconds (adjustable) after all controls are returned to neutral – reducing fuel consumption and noise levels in the cab

"INTELLIGENT FLOATING BOOM" MODE

The "intelligent floating boom" function allows the boom to move up and down freely according to the application:

- Hydraulic breaker setting: during boom down operation, the boom moves down freely under its own weight. The result is reduced shock and vibration and longer breaker service life
- Full float setting: during boom down selection, the boom is allowed to rise and fall as required while the bucket is drawn across the ground

EXPERT FINGERTIP CONTROL

- The new multi-function 8" touchscreen displays all useful information in a visual and intuitive format
- At a glance, you can check the machine's status and settings to achieve optimal efficiency
- HYUNDAI's unique jog shuttle switch gives you easy and precise control over all machine functions
- Highly sensitive and low-effort joysticks enable you to work safely, smoothly and confidently
- The proportional thumb switches on the joysticks can be mounted horizontally or vertically, as the operator prefers, for optimal control of hydraulic attachments

4 WORK MODES AND 4 POWER MODES + BOOM / SWING PRIORITY CONTROL



Delivers the needed power according to your specific application while minimizing fuel consumption:

- 1-way mode, 2-way mode, digging mode and lifting mode
- Power plus mode, power mode, standard mode, economy mode
- Boom / swing priority control allows you to control operating modes with just 1 button – resulting in more comfortable and productive operation optimized for various work environments



BOOM PRIORITY MODE

Hydraulic power

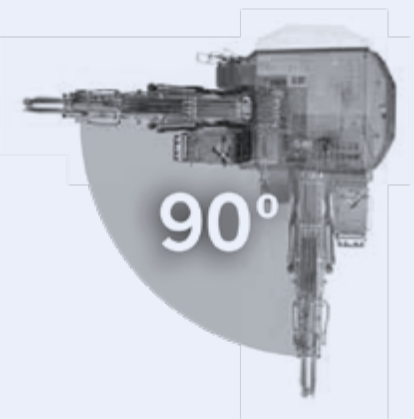

SWING PRIORITY MODE

Hydraulic power



HX1000A_L

SIMPLE MAINTENANCE




AIR COMPRESSOR

Air gun in your cab helps you keep the environment clean and comfortable.



WIDE CATWALK

Maintenance is made easier with 520 mm catwalk.

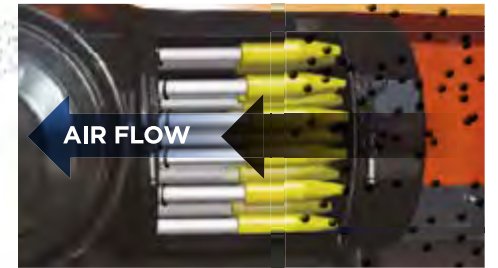

HEAVY-DUTY AIR CLEANER

2-stage air cleaner protects engine from dust and contaminating particles – avoids downtime and is easy to maintain.

REVERSIBLE FAN

- Rotating cooling fan in reverse direction is possible.
- Able to blow away dust on radiator and oil cooler easily to save time & effort.

CENTRALIZED FUEL FILTRATION SYSTEM

Water separator, pre-fuel filter and main filter are grouped together to increase engine life and prevent machine failures, making machine inspection or maintenance much easier with one simple access.

ELECTRIC FUEL TRANSFER PUMP (ETP)

Use this switch to easily refill fuel for your machine after its inspection or repair.

AUTO GREASE SYSTEM (AGS)

This new auto grease filling device helps reduce maintenance time significantly and prevents unexpected downtime.

HX1000AL

SPECIFICATIONS

Engine	
Make	Perkins
Model	2806J
Number of cylinders	6
Rated power, gross (hp per SAE J1995)	629 hp (469 kW) @ 2000 rpm
Max. torque, gross (SAE J1995)	2178 ft.·lb. (2951 Nm) @ 1300 rpm
Piston displacemen	1105 in. ³ (18.1 L)
Bore and stroke	145 mm x 183 mm (5.7 in. x 7.2 in.)
Starter	9.0 kW (24 V, 12 hp)
Battery	2 x 12 V, 200 AH
Alternator	24 V, 115 A
Air cleaner	Three-stage

Hydraulics	
Main pumps	3 x 523 L/min. (3 x 138 gpm)
Air cleaner	60 L/min. (15.9 gpm)

Working Pressure	
Boom/arm/bucket (normal mode)	357 kg/cm ² (5076 psi)
Travel	357 kg/cm ² (5076 psi)
Swing	300 kg/cm ² (4270 psi)
Pilot	204 kg/cm ² (2901 psi)

Undercarriage	
Upper rollers (each track)	3
Lower rollers (each track)	9
Number of shoes (links per side)	51

Swing Mechanism	
Swing speed	0 – 6.3 rpm
Swing torque	39330 kgf·m (284474 lbf.·ft.)

NOTE: Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. All dimensions are given for HYUNDAI excavators equipped with standard tracks and the standard front as listed. Pictures of HYUNDAI excavators may show other than standard equipment. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. HYUNDAI equipment is manufactured with a Quality Management System that is in compliance with ISO 9001:2008.

Drive System	
Travel speed [low – high]	2.6 – 4.3 km/h (1.6 – 2.7 mph)
Traction force, max. (drawbar pull)	78700 kgf·m (173504 lbf.·ft.)
Max. grade (limited by engine lubrication)	35° (70%)

Environment	
Sound level (2000/14/EC)	109 dB(A)
Cabin sound level (ISO 6396)	71 dB(A)

Refill Capacities	
Fuel tank	1138 L (300.6 gal.)
DEF tank	47 L (12.4 gal.)
Cooling system (radiator capacity)	105.1 L (27.5 gal.)
Engine oil (with filler)	65 L (17.2 gal.)
Swing drive	2 x 8 L (2 x 2.1 gal.)
Final drive (each side)	20 L (5.3 gal.)
Hydraulic system	881 L (233 gal.)
Hydraulic tank	533 L (141 gal.)


Hydraulic Cylinders	
Boom (2) bore x rod diameter x stroke	1138 L (300.6 gal.)
Arm (1) bore x rod diameter x stroke	47 L (12.4 gal.)
Bucket (1) bore x rod diameter x stroke	STD 105.1 L (27.5 gal.)
	ME* 65 L (17.2 gal.)

*ME: Mass Excavation arm
The piston rods and cylinder bodies are made of high-strength steel. A shock-absorbing mechanism is fitted in all cylinders to ensure shock-free operation and extended piston life.

HX1000AL

DIMENSIONS


		HX1000AL	
Boom length		8400 mm (27' 7")	7250 mm (23' 9")
Arm length		3750 mm (12' 4")	2900 mm (9' 6")
Bucket type (SAE)		5.4 m ³ (7.06 yd ³)	6.8 m ³ (8.89 yd ³)
Track type		Retractable	
Tail swing radius		A ₁	4620 mm (15' 2")
Tail swing overhang (rear)		A ₂	1395 mm (4' 7")
Tail swing overhang (side)	without step	A ₃	2465 mm (8' 1")
	with step		2319 mm (7' 7")
Shipping height (boom)		B	5450 mm (17' 11")
Shipping height (hose)		C	5550 mm (18' 3")
Shipping length		D	14550 mm (47' 9")
Shipping width (with step)		E	3982 mm (13' 1")
Counterweight clearance*		F	1560 mm (5' 1")
Cabin height		G	3615 mm (11' 10")
Upper structure width	without catwalks	H	3410 mm (11' 2")
	with catwalks		4450 mm (14' 7")
Cabin height above house		I	–
Cabin width		J	1010 mm (3' 4")
Tumbler distance		K	5100 mm (16' 9")
Overall track length		L	6341 mm (20' 10")
Undercarriage width (without step)	retracted	M	3690 mm (12' 1")
	extended		4450 mm (14' 7")
Undercarriage width (with step)	retracted		3982 mm (13' 1")
	extended		4742 mm (15' 7")
Track gauge (extended)		N	3550 mm (11' 8")
Track shoe width		O	900 mm (36")
Track height		P	1452 mm (4' 9")
Car body clearance*		Q	860 mm (2' 10")

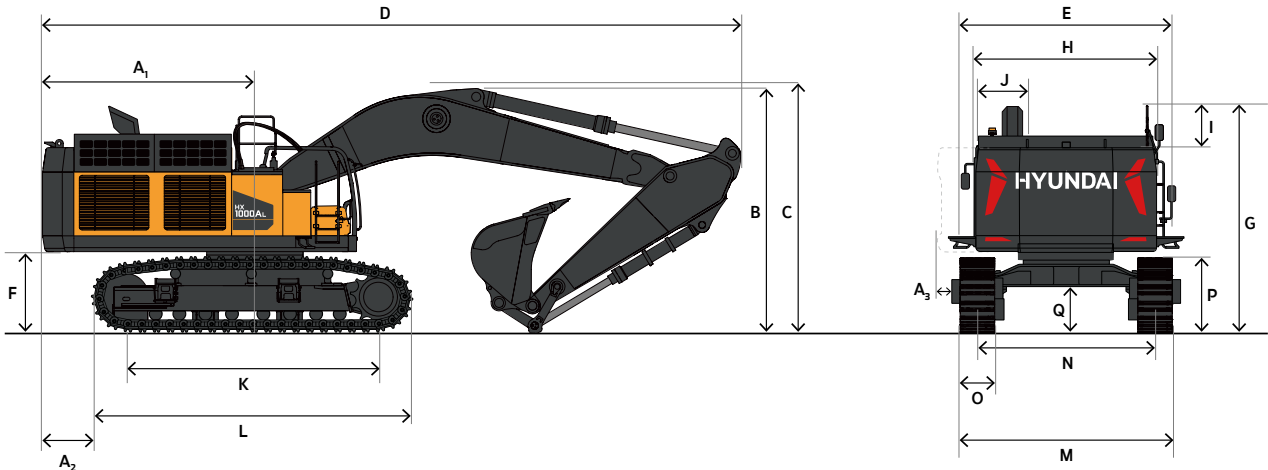

HX1000AL

WORKING RANGE

HX1000AL			
Boom length		8400 mm (27' 7")	7250 mm (23' 9")
Arm length		3750 mm (12' 4")	2900 mm (9' 6")
Bucket type (SAE, PCSA)		5.4 m³ (7.06 yd³)	6.8 m³ (8.89 yd³)
Track type		Retractable	
Max. digging reach	A	14275 mm (46' 10")	12430 mm (40' 9")
Max. digging reach (ground)	B	14000 mm (45' 11")	12110 mm (39' 9")
Max. digging depth	C	8795 mm (28' 10")	7260 mm (23' 10")
Max. loading height	D	9440 mm (31' 0")	8100 mm (26' 7")
Min. loading height	E	4210 mm (13' 10")	3910 mm (12' 10")
Max. digging height	F	13840 mm (45' 5")	12425 mm (40' 9")
Max. bucket pin height	G	11862 mm (38' 11")	10515 mm (34' 6")
Max. vertical wall depth	H	4470 mm (14' 8")	2965 mm (9' 9")
Max. radius vertical	I	12265 mm (40' 3")	10995 mm (36' 1")
Max. depth to 8' line	J	8665 mm (28' 5")	7110 mm (23' 4")
Min. radius to 8' line	K	5290 mm (17' 4")	4410 mm (14' 6")
Min. digging reach	L	3365 mm (11' 0")	1970 mm (6' 6")
Min. swing radius	M	6295 mm (20' 8")	5345 mm (17' 6")
Bucket angle (DEG)	d	143.8°	145.3°
Digging force, bucket (PCSA)	ISO	88185 lbf. (40000 kgf)	98767 lbf. (44800 kgf)
Digging force, arm		79850 lbf. (36220 kgf)	88846 lbf. (40300 kgf)
Operating weight		220880 lb. (100400 kg)	220282 lb. (100128 kg)
Ground pressure	14.4 psi (1.01 kg/cm²)		

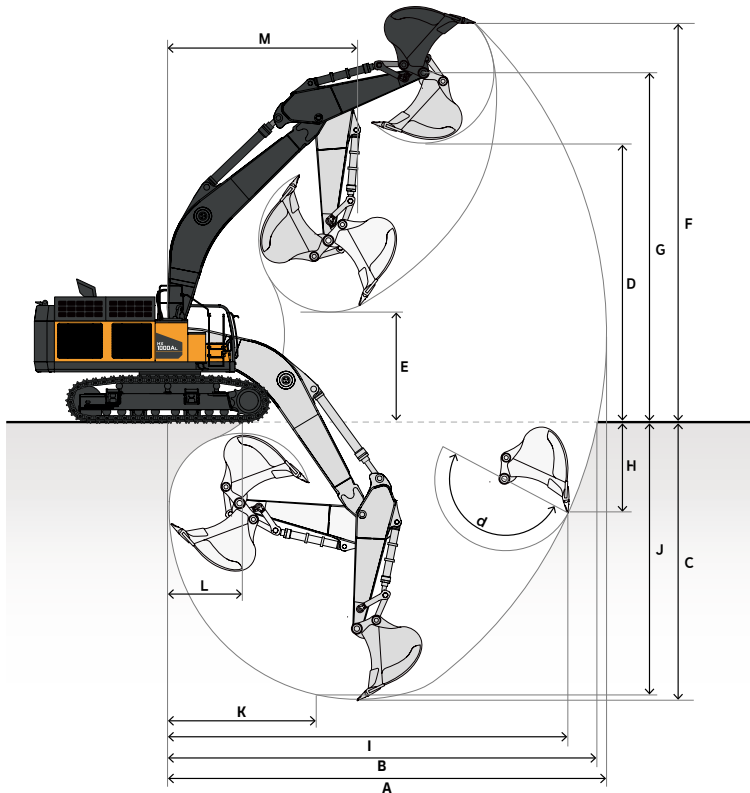

HX1000AL

BUCKET

HX1000AL		
Boom	8400 mm (27' 7")	7250 mm (23' 9")
Arm	3750 mm (12' 4")	2900 mm (9' 6")
Shoe size	900 mm (36")	
Track type	Retractable	
Mount	Pin-on	
Removeable counterweight	11300 kg (24860 lb.)	

Bucket Type	Capacity* – yd3 (m3)		Width – in. (mm)	
	CECE	SAE	with cutter	without cutter
Severe-duty	4.9 m³ (6.4 yd³)	5.4 m³ (7.06 yd³)	1940 mm (76.37")	
	6.1 m³ (7.97 yd³)	6.8 m³ (8.8 yd³)	2320 mm (91.3")	

Bucket Type	Capacity* – yd3 (m3)		650 Shoe		750 Shoe		900 Shoe	
	CECE	SAE						
Severe-duty	4.9 m³ (6.4 yd³)	5.4 m³ (7.06 yd³)	D	A	D	A	D	A
	6.1 m³ (7.97 yd³)	6.8 m³ (8.8 yd³)	X	C	X	C	X	C


*Capacity based on ISO 10567 and SAE J296, arm length without quick change clamp

- Equipped with bolt-on wear shrouds
- Equipped with bolt-on teeth
- Equipped with bolt-on cutting edge
- These recommendations are given as a guide only and based on typical operating conditions.

Maximum Suitable Material Density

- 2100 kg/m³ (A 3500 lb./yd³)
- 1800 kg/m³ (B 3000 lb./yd³)
- 1500 kg/m³ (C 2500 lb./yd³)
- 1200 kg/m³ (D 2000 lb./yd³)
- X Not Recommended

Please consult with your HYUNDAI dealer to properly match buckets and attachments for the application.

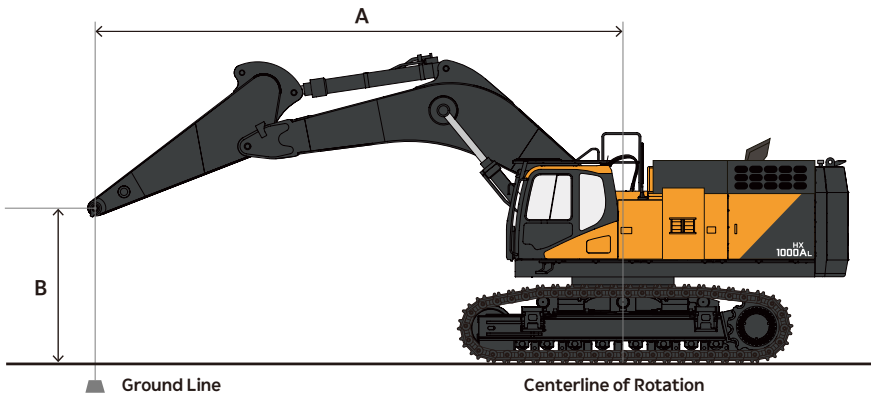


LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

HX1000AL														
Boom: 8400 mm (27' 7"), Arm: 3750 mm (12' 4"), Counterweight: 11300 kg (24860 lb.), 900 mm (36") Double Grouser, No Dozer, Bucket: None, Unit: kg (lb.)														
A (ft. or m) B (ft. or m)		15' (4.5 m)		20' (6.0 m)		25' (7.5 m)		30' (9.0 m)		35' (10.5 m)		Max. Reach		A
10.5 m	kg							* 15280	* 15280			* 14660	* 14660	9.05 m
35'	lb							(* 33690)	(* 33690)			(* 32320)	(* 32320)	(29.70')
9.0 m	kg							* 16190	* 16190			* 13920	* 13920	10.17 m
30'	lb							(* 35690)	(* 35690)			(* 30690)	(* 30690)	(33.36')
9.8ft	kg					* 18480	* 18480	* 16760	* 16760	* 15770	15360	* 13640	* 13640	10.97 m
25'	lb					(* 40750)	(* 40750)	(* 36950)	(* 36950)	(* 34770)	(33860)	(* 30070)	(* 30070)	(35.98')
8.2ft	kg					* 20440	* 20440	* 17820	* 17820	* 16200	15000	* 13680	12710	11.50 m
20'	lb					(* 45060)	(* 45060)	(* 39280)	(* 39280)	(* 35710)	(33070)	(* 30160)	(28030)	(37.75)
6.6ft	kg					* 22680	* 22680	* 19100	18520	* 16870	14510	* 14010	11850	11.83 m
15'	lb					(* 50010)	(* 50010)	(* 42110)	(40830)	(* 37200)	(31990)	(* 30880)	(26120)	(38.80')
4.9ft	kg					* 24720	23040	* 20340	17670	* 17570	14000	* 14640	11380	11.95 m
10'	lb					(* 54500)	(50790)	(* 44840)	(38970)	(* 38730)	(30870)	(* 32270)	(25090)	(39.21')
3.3ft	kg					* 26100	22010	* 21270	16990	* 18090	13570	* 15630	11270	11.88 m
5'	lb					(* 57540)	(48520)	(* 46890)	(37450)	(* 39880)	(29920)	(* 34450)	(24840)	(38.98')
Ground	kg					* 26600	21410	* 21680	16520	* 18230	13280	* 16090	11510	11.62 m
Level	lb					(* 58650)	(47190)	(* 47800)	(36430)	(* 40200)	(29270)	(* 35460)	(25380)	(38.11')
-1.5 m	kg			* 32780	29700	* 26180	21170	* 21410	16320	* 17760	13180	* 16240	12190	11.14 m
-5'	lb			(* 72260)	(65470)	(* 57710)	(46680)	(* 47200)	(35970)	(* 39150)	(29050)	(* 35800)	(26880)	(36.55')
-3.0 m	kg	* 37670	* 37670	* 30520	29960	* 24730	21260	* 20200	16380			* 16260	13500	10.42 m
-10'	lb	(* 83060)	(* 83060)	(* 67280)	(66050)	(* 54530)	(46870)	(* 44530)	(36110)			(* 35850)	(29760)	(34.19')
-4.5 m	kg	* 32730	* 32730	* 26910	* 26910	* 21930	21680	* 17380	16800			* 15960	15890	9.41 m
-15'	lb	(* 72150)	(* 72150)	(* 59330)	(* 59330)	(* 48350)	(47780)	(* 38320)	(37040)			(* 35180)	(35030)	(30.88')
-6.0 m	kg			* 21140	* 21140	* 16600	* 16600					* 14760	* 14760	7.98 m
-20'	lb			(* 46610)	(* 46610)	(* 36590)	(* 36590)					(* 32550)	(* 32550)	(26.19')







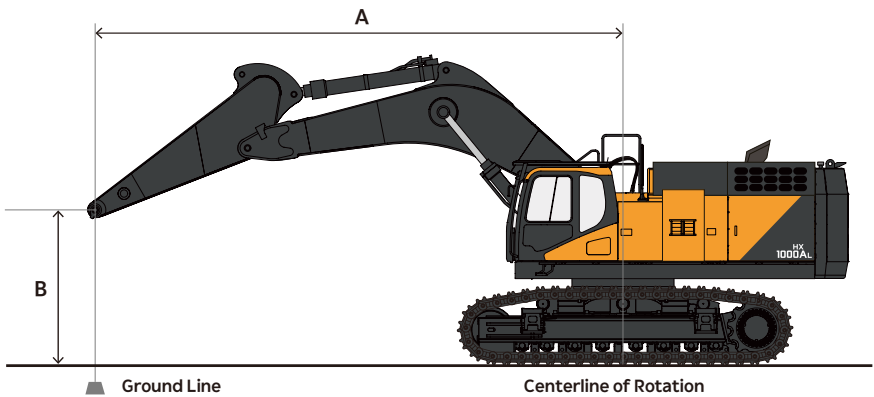



A Distance from center of rotation
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb. (75 kg) operator.




LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

HX1000AL												
Boom: 7250 mm (23' 9"), Arm: 2900 mm (9' 6"), Counterweight: 11300 kg (24860 lb.), 900 mm (36") Double Grouser, No Dozer, Bucket: None, Unit: kg (lb.)												
A (ft. or m) B (ft. or m)		4.5 m (15')		6.0 m (20')		7.5 m (25')		9.0 m (30')		Max. Reach		A
												
10.5 m	kg									* 43780	* 43780	20.99'
35'	lb									(* 19860)	(* 19860)	(6.40 m)
9.0 m	kg					* 46570	* 46570			* 39360	* 39360	25.93'
30'	lb					(* 21120)	(* 21120)			(* 17850)	(* 17850)	(7.90 m)
9.8ft	kg					* 47040	* 47040			* 37570	* 37570	29.23'
25'	lb					(* 21340)	(* 21340)			(* 17040)	(* 17040)	(8.91 m)
8.2ft	kg			* 26700	* 26700	* 50180	* 50180	* 45440	* 45440	* 37210	* 37210	31.39'
20'	lb			(* 58870)	(* 58870)	(* 22760)	(* 22760)	(* 20610)	(* 20610)	(* 16880)	(* 16880)	(9.57 m)
6.6ft	kg			* 30640	* 30640	* 54530	* 54530	* 47320	44400	* 37940	37730	32.67'
15'	lb			(* 67560)	(* 67560)	(* 24730)	(* 24730)	(* 21460)	-20140	(* 17210)	-17110	(9.96 m)
4.9ft	kg			* 34080	* 34080	* 58720	56260	* 49410	43040	* 39750	36120	33.15'
10'	lb			(* 75130)	(* 75130)	(* 26640)	-25520	(* 22410)	-19520	(* 18030)	-16380	(10.10 m)
3.3ft	kg			* 79020	75140	* 61510	54350	* 50790	41910	* 42890	35950	32.88'
5'	lb			(* 35840)	-34080	(* 27900)	-24650	(* 23040)	-19010	(* 19460)	-16310	(10.02 m)
Ground	kg			* 78850	73900	* 62030	53250	* 50560	41260	* 45810	37280	31.84'
Level	lb			(* 35770)	-33520	(* 28140)	-24160	(* 22930)	-18720	(* 20780)	-16910	(9.70 m)
-1.5 m	kg	* 43150	* 43150	* 75010	73820	* 59610	53010	* 47190	41350	* 46020	40640	29.94'
-5'	lb	(* 95130)	(* 95130)	(* 34030)	-33480	(* 27040)	-24050	(* 21400)	-18750	(* 20870)	-18430	(9.13 m)
-3.0 m	kg	* 37880	* 37880	* 66940	* 66940	* 52700	* 52700			* 45320	* 45320	27.00'
-10'	lb	(* 83510)	(* 83510)	(* 30360)	(* 30360)	(* 23900)	(* 23900)			(* 20560)	(* 20560)	(8.23 m)
-4.5 m	kg	* 29390	* 29390	* 51600	* 51600					* 41910	* 41910	22.61'
-15'	lb	(* 64800)	(* 64800)	(* 23410)	(* 23410)					(* 19010)	(* 19010)	(6.89 m)

A Distance from center of rotation
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb. (75 kg) operator.

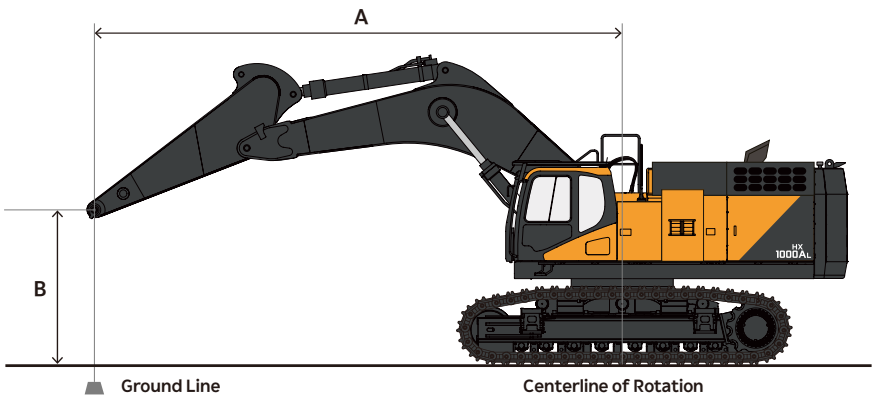

STANDARD & OPTIONAL EQUIPMENT

MEMO

● : Standard / ○ : Option

ENGINE

Perkins 2806J	●
Stage V compliant	●
Turbo, waste gate (WGT)	●
Air-to-air intercooler	●
Selective catalyst reduction (SCR)	●
Diesel oxidation catalyst (DOC)	●
Diesel particulate filter (DPF)	●
Three-stage air cleaner (cyclonic pre-filter & 2 filter elements)	●

HYDRAULIC

Pilot-operated control valves	●
Pattern control change valve	●
Removable counterweight system	●
Variable-speed hydraulic cooling fan	●
Axial piston swing motors	●
Auxiliary hydraulics, one- & two-way piping with pedal	●
Auxiliary hydraulics, rotate piping	●
Quick coupler piping	●
Adjustable auxiliary flow & pressure, 10 presets	●
Intelligent floating boom	●
Breaker return filter	●
Boom & arm lock valves	●
Boom & arm flow regeneration	●
Straight travel	●

CONTROLS

Proportional control for auxiliary hydraulics, roll switch on both joysticks	●
Limp home mode control switch	●
Auto idle control system, one-touch deceleration button on joystick	●
Engine speed control dial	●
Advanced mechatronics with power mode control system	●
Power modes (P+, P, S, E)	●
Work modes (excavating, lifting, breaker, shear)	●
Jog dial display control	●
Electronic Power Optimizing System (EPOS)	●
Cross-sensing pump control	●

CABIN

Steel, all-weather & sound-suppressed	●
Vandalism guard hooks	●
Viscous mount with spring reinforcement	●
Front window with wiper/was	●
Tinted safety glass	●
Skylight top hatch with sun screen	●
Pull-up type top front window	●
Removable lower front window with storage behind seat	●
Adjustable sliding side door window	●
Defrost, front window	●
Seat - Heated - Air suspension - 2" (51 mm) seat belt - Adjustable height & recline - Adjustable fore/aft - Adjustable armrests - Adjustable lumbar	●
Leatherette seat - Heating & cooling - Air suspension - 2" (51 mm) seat belt - Adjustable height & recline - Adjustable fore/aft - Adjustable armrests - Adjustable lumbar - Adjustable headrest - Adjustable bottom cushion - Height adjustable panels - Sliding control console	○
Fully automatic HVAC with ambient temperature sensor	●
8" multi-function LCD interactive display monitor	●
Digital Bluetooth® audio broadcasting MP3 radio with cell phone integration - Audio control panel on/off switch - Control volume - Channel select	●
Antenna, roof-mounted	●
Emergency breakout tool	●
Cup holder	●
Shoe case	●
Coat hanger	●
Rain shield	●
Fog guard	●
Front window guard	●

ELECTRICAL

System voltage – 24 V	●
Alternator – 24 V, 115 amp	●
2 x 12 V batteries, 200 AH reserve capacity	●
Main circuit breaker	●
Power sockets – 12 V & 24 V	●
Electrical remote box with spare fuses & spare relays	●
LED lights: machine (2), boom (2)	●
Light, work (LED): 8	●
Rotating beacon	●
Overload warning alarm	●
Hour meter	●
Engine restart prevention system	●
Side view & rearview camera with LED lamps (3)	●
360° all-around view camera	●
Laptop service port	●
Self-diagnostics system	●
Smart key (remote ignition key)	●
Emergency stop switch	●
Swing alarm	●
Travel alarm	●
Lower window wiper	●
HYUNDAI Fleet Management	●

UNDERCARRIAGE

Track guards & chains with adjusters	●
Track rollers, upper	3
Track rollers, lower	9
Shoes, double grouser – 600 mm	●
Shoes, double grouser – 750 mm	●
Shoes, double grouser – 900 mm	●

OTHER

Automatic lubrication	●
Handrails & service platforms	●
Skid-resistant steps & service platforms, upper deck	●
HYUNDAI Fleet Management 3-year subscription	●
Air compressor	●

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.
* The photos may include attachments and optional equipment that are not available in your area.
* Materials and specifications are subject to change without advance notice.
* All imperial measurements rounded off to the nearest pound or inch.