

STANDARD EQUIPMENT

ISO Standard cabin
All-weather steel cab with 360° visibility
Safety glass windows
Rise-up type windshield wiper
Sliding fold-in front window
Sliding side window(LH)
Lockable door
Hot & cool box
Storage compartment & Ashtray
Cabin roof-steel cover
Radio & USB player
12 volt power outlet (24V DC to 12V DC converter)
Computer aided power optimization (New CAPO) system
3-power mode, 2-work mode, user mode
Auto deceleration & one-touch deceleration system
Auto warm-up system
Auto overheat prevention system
Automatic climate control
Air conditioner & heater
Defroster
Self-diagnostics system
Starting Aid (air grid heater) for cold weather
Centralized monitoring
LCD display
Engine speed or Trip meter/Accel.
Clock
Gauges
Fuel level gauge
Engine coolant temperature gauge
Hyd. oil temperature gauge
Warnings
Check engine
Communication error
Low battery
Air cleaner clogging
Indicators
Max power
Low speed/High speed
Fuel warmer
Auto idle
Door and cab locks, one key
Two outside rearview mirrors
Fully adjustable suspension seat with seat belt
Pilot-operated slidable joystick
Four front working lights
Electric horn
Batteries (2 x 12V x100 AH)
Battery master switch
Removable clean-out screen for oil cooler
Automatic swing brake
Removable reservoir tank
Fuel pre-filter with fuel warmer
Boom holding system
Arm holding system
Accumulator for lowering work equipment
Electric transducer
Lower frame under cover (Normal)
Tires-dual (9.00-20-14PR)
Travel alarm
Rear dozer blade

OPTIONAL EQUIPMENT

Fuel filler pump (35 L/min)
Beacon lamp
Single-acting piping kit (breaker, etc.)
Double-acting piping kit (clamshell, etc.)
Quick coupler
Travel alarm
Booms
4.6m, 15' 1"
Arms
1.9m, 6' 3"
2.1m, 6'11"
2.5m, 8' 2"
3.0m, 9' 10"
Cabin ROPS (ISO 12117-2)
ROPS (Roll Over Protective Structure)
Cabin FOPS (ISO 10262 Level II)
FOPS (Falling Object Protective Structure)
Cabin guard-Front
Wire net
Fine net
Cabin lights
Cabin front window rain guard
Sun visor
Undercarriage
Rear outrigger
Rear dozer and front outrigger
Rear and front outrigger
Rear outrigger and front dozer
Lower frame under cover (Additional)
Pre-heating system, coolant
Tool kit
Operator suit
Rearview camera
Seat
Mechanical suspension seat with heater
Tires - dual (9.00 - 20 solid)
Fenders (Mudguards)
Hi MATE (Remote Management System)
Air compressor
Precleaner
Rear work lamp

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.

* The photos may include attachments and optional equipment that are not available in your area.

* Materials and specifications are subject to change without advance notice.

* All imperial measurements rounded off to the nearest pound or inch.



Head Office(Sales Office)
11F, GLOBAL R&D CENTER, 477 BUNDANG SUSEO-RO, BUNDANG-GU, SEONGNAM-SI, GYEONGGI-DO, 13553, KOREA

PLEASE CONTACT

Robex 140W-9S

With Tier 2 Engine installed



*Photo may include optional equipment.

Pride at Work

Hyundai Construction Equipment strives to build state-of-the art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality. Take pride in your work with Hyundai!



Robex 140w-9s

Machine Walk-Around

Engine Technology

Proven / reliable, fuel efficient Cummins Tier II B3.9-C engine
Low noise / Auto engine warm up feature / Anti-restart feature

Hydraulic System Improvements

New patented hydraulic control system for improved controllability / Improved control valve design for added efficiency and smoother operation / New auto boom and swing priority system for optimum speed / New auto power boost feature for additional power when needed / Improved arm-in flow regeneration system for added speed and efficiency

Pump Compartment

Industry-leading, powerful, reliable Kawasaki designed, variable volume in-line axial piston pumps
New compact solenoid block equipped with 3 solenoid valves, 1 EPPR valve, 1 check valve accumulator and pilot filter-controls safety lock, power boost, arm-in regeneration control, boom priority(swing logic valve control)
Remotely mounted fuel, engine oil and case drain filters for maximum convenience while servicing

Carrier

Heavy duty carrier frame with two speed powershift transmission
Heavy duty drive line and axles / Front axle oscillation +/- 7 degrees with ram lock
Wet disc brake (front & rear) / Automatic parking brake - spring applied, hydraulically released

Improved Steering Column

Slim-profile steering column capable of telescoping 60 mm and tilting 30 degrees

Enhanced Operator Cab

Improved visibility
Enlarged cab with improved visibility
Larger right-side glass, now one piece, for better right visibility
Safety glass windows on all sides - less expensive than (polycarbonate) and won't scratch or fade
Reduced front window seam for improved operator view

Improved Cab Construction

New steel tube construction for added operator safety, protection and durability
New window open/close mechanism designed with cable and spring lift assist and single latch release

Improved Suspension Seat / Console Assembly

Ergonomic joysticks with auxiliary control buttons for attachment use, now with new sleek styling
Adjustable arm rests - turn dial to raise or lower for optimum comfort

Advanced 7" Color Cluster

New Color LCD Display with easy to read digital gauges for hydraulic oil temperature, water temperature, and fuel / Simplified design makes adjustment and diagnostics easier. Also, new enhanced features such as rear-view camera are integrated into monitor.
3 power modes : (P) Power, (S) Standard, (E) Economy
2 work modes : Dig & Attachment, (U) User mode for operator preference
Enhanced self-diagnostic features with GPS / satellite technology
One pump flow or two pump flow for optional attachment is now selectable through the cluster.
New anti-theft system with password capability
Boom speed and arm regeneration are selectable through the monitor.
Auto power boost is now available - selectable (on/off) through the monitor.
Powerful air conditioning and heat with auto climate control, 20% more heat and air output than 7 series!
Hi MATE (Remote Management System) works through GPS/Satellite technology to ultimately provide better customer service and support

*Photo may include optional equipment.

Preference

Operating a 9S Series is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.



*Photo may include optional equipment.



Wide Cabin with Excellent Visibility

The newly designed cabin was conceived for more space, a wider field of view and operator comfort. Special attention was given to a clear, open and convenient interior with plenty of visibility on the machine surroundings and the job at hand. This well balanced combination of precision aspects put the operator in the perfect position to work safely and securely.

Operator Comfort

In 9S Series cabin you can easily adjust the seat, console and armrest settings to best suit your personal operating preferences. Seat and console position can be set together and independent from each other. Improved steering wheel telescope and tilt functions provide operators improved access. A fully automatic, high capacity airconditioning system maintains a constant preferred temperature.



Reduced Stress

Work is stressful enough. Your work environment should be stress free. Hyundai's 9S series provides improved cab amenities, additional space and a comfortable seat to minimize stress to the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with USB player, AM/FM stereo is perfect for listening to music favorites.



Operator - Friendly Cluster

The advanced new cluster with 7 inch wide color LCD screen and toggle switch allows the operator to select his personal machine preferences. Power and work mode selection, self diagnostics, optional rear-view camera, maintenance check lists, start-up machine security, and video functions were integrated into the cluster to make the machine more versatile and the operator more productive.



Precision

Innovative hydraulic system technologies make the 9S Series excavator fast, smooth and easy to control.



*Photo may include optional equipment.

Computer Aided Power

The engine horsepower and hydraulic horsepower together in unison through the advanced CAPO(Computer Aided Power Optimization) system, flow for the job at hand. Operator can set their own preferences for boom or swing priority, power mode selection and optional work tools at the touch of a button. The CAPO system also provides complete self diagnostic features and digital gauges for important information like hydraulic oil temperature, water temperatures and fuel level. This system interfaces with multiple sensors placed throughout the hydraulic system as well as hydraulic flow.

Power Mode

P (Power Max) mode maximizes machine speed and power for mass production. S (Standard) mode provides a reduced, fixed rpm for optimum performance and improved fuel economy. For maximum fuel savings and improved control, E (Economy) mode provides precise flow based on load demand. Three unique power modes provide the operator with custom power, speed and fuel economy.

Work Mode

The work mode allows the operator to select single flow attachments like a hydraulic breaker or bi-directional flow attachments like a crusher. Flow settings unique to each attachment can be programmed from within the cluster.

User Mode

Some jobs require more precise machine settings. Using the versatile U (User) mode, the operator can customize engine speed, pump output, idle speed and other machine settings for the job at hand.

Improved Hydraulic System



To achieve optimum precision, Hyundai redesigned the hydraulic system to provide the operator with super fine touch and improved controllability. Improved pump flow control reduces flow when controls are not being used to minimize fuel consumption. Improved spool valves in the control valve are engineered to provide more precise flow to each function with less effort. Improved hydraulic valves, precision-designed variable volume piston pumps, fine-touch pilot controls, and enhanced travel functions make any operator running a 9S Series look like a smooth operator. Newly improved features include arm-in and boom-down flow regeneration, improved control valve technology and innovative auto boom and swing priority for optimal performance in any application.

Auto Boom-swing Priority

This smart function automatically and continuously looks the ideal hydraulic flow balance for the boom and swing motions of the machine. The advanced CAPO system monitors the hydraulic system and adjusts its settings to maximize performance and productivity.




Performance

9S Series is designed for maximum performance to keep the operator working productively.





*Photo may include optional equipment.

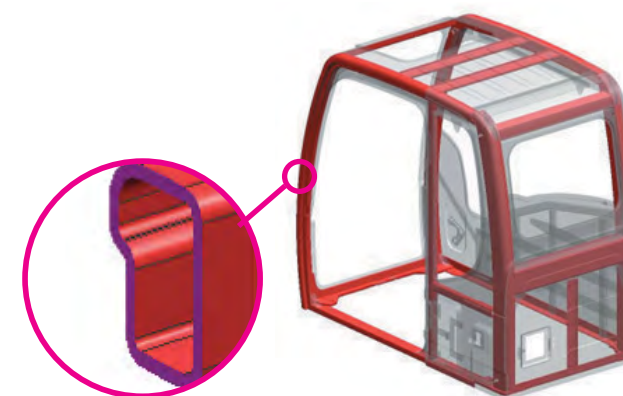

Structural Strength

The 9S series cabin structure has been fitted with stronger but slimmer tubing for more safety and better visibility. Low-stress and high strength steel was integrally welded to form a strong and stable lower frame. Structural durability was evaluated and tested by means of FEM (Finite Elements Method) analysis and long-term durability tests. The optional ROPS (Roll Over Protective Structure) cab can be equipped to enhance operator safety.

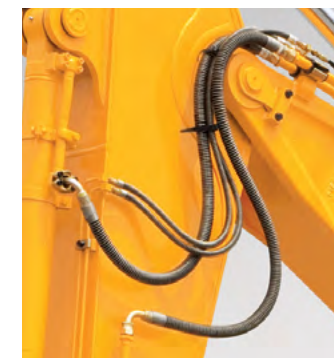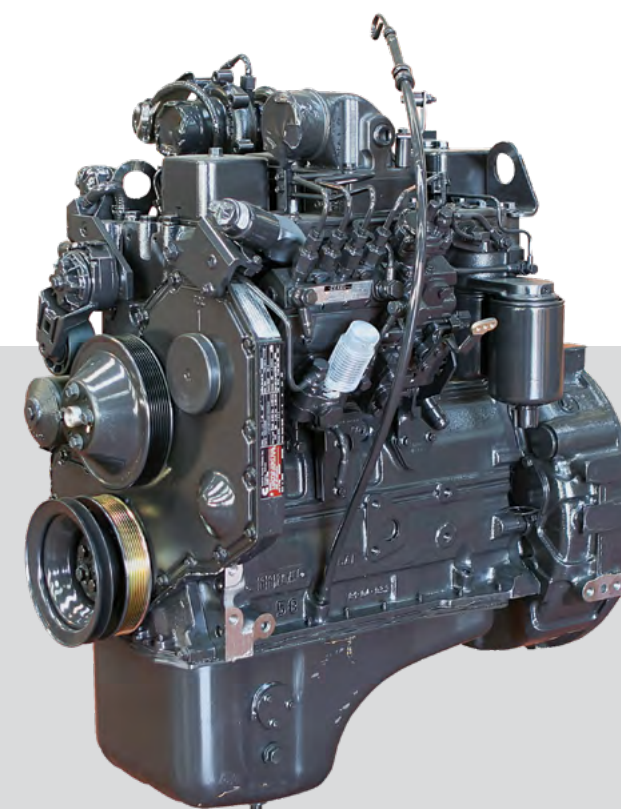

Improved Durability

9S series excavators are equipped with stainless spring guards to protect the hoses from external damages. Both dozer and outrigger are equipped with cylinder guards for added protection.

New Auto Ram Lock System

During not traveling in work-mode, a new auto ram lock system is available to improve operating safety.



CUMMINS B3.9C ENGINE

The Cummins B3.9-C engine has been designed with 40% fewer parts than the competitors. That means there's less that can go wrong when you need it most. It also means fewer parts to inventory. Repairs are simplified because no special tools are needed for maintenance. The weight of the machine is reduced without sacrificing strength.

The B3.9-C engine is capable of reaching emission standards without electronic engine controls. You get a proven power plant that meets ecological concerns, without paying a premium for technology you don't need.

Profitability


9S Series is designed to maximize profitability through improved efficiencies, enhanced service features and longer life components.



*Photo may include optional equipment.


Fuel Efficiency

9S Series excavators are engineered to be extremely fuel efficient. New innovations like two-stage auto decel system and the new economy mode help to conserve fuel and reduce the impact on the environment.

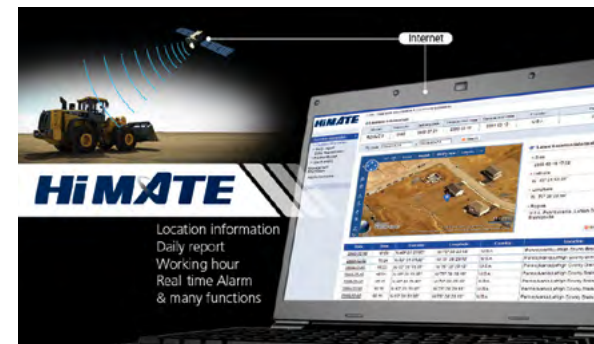

Hi MATE (Remote Management System)

Hi MATE, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries, reducing the need for multiple service calls. Hi MATE saves time and money for the owner and dealer by promoting preventative maintenance and reducing machine downtime.

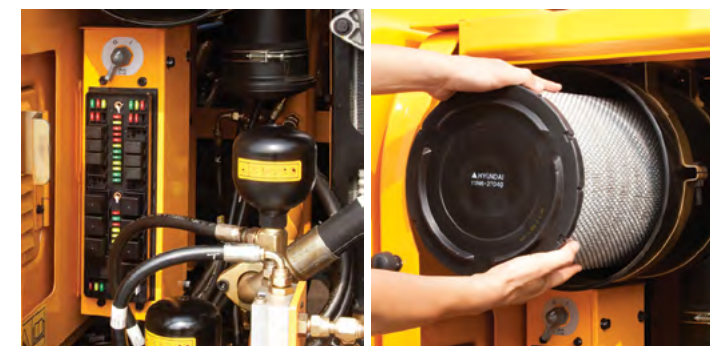

Easy Access

Ground-line access to filters, lube fittings, fuses, machine computer components and wide open compartments makes service more convenient on the 9S Series.



Long-Life Components

9S series excavators were designed with bushings designed for long-life lube intervals (250 hrs) & polymer shims (wear resistant, noise reducing), long-life hydraulic filters (1,000hrs), long-life hydraulic oil (5,000hrs), more efficient cooling systems and integrated preheating systems which extend service intervals, minimize operating costs and reduce machine down time.

Specifications

ENGINE

MODEL			Cummins B3.9-C
Type			Water cooled, 4 cycle diesel, 4-cylinders in line, direct injection, turbocharged, charger air cooled, low emission
Rated flywheel horsepower	SAE	J1995 (gross)	113 HP (84 kW) at 2100 rpm
		J1349 (net)	105 HP (78 kW) at 2100 rpm
	DIN	6271/1 (gross)	115 PS (84 kW) at 2100 rpm
		6271/1 (net)	106 PS (78 kW) at 2100 rpm
Max. torque			45.6 kgf·m (330lb·ft) / 1,500 rpm
Bore X stroke			102 mm X 120 mm (4.02" X 4.72")
Piston displacement			3,900cc (238 in³)
Batteries			2 x 12 V x 100 AH
Starting motor			24V, 4.5 kW
Alternator			24V, 70 Amp

HYDRAULIC SYSTEM

MAIN PUMP	
Type	Two variable displacement piston pumps
Rated flow	2 X 130 L /min (34.3 US gpm/28.6 UK gpm)
Sub-pump for pilot circuit	Gear pump

Cross-sensing and fuel saving pump system

HYDRAULIC MOTORS	
Travel	Axial piston motor with brake valve
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING	
Implement circuits	350 kgf/cm² (4,970 psi)
Travel	380 kgf/cm² (5,400 psi)
Power boost (boom, arm, bucket)	380 kgf/cm² (5,400 psi)
Swing circuit	285 kgf/cm² (4,050 psi)
Pilot circuit	40 kgf/cm² (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS	
No. of cylinder bore X stroke	Boom : 2-105 x 1,075 mm (4.1" x 42.3")
	Arm : 1-115 x 1,138 mm (4.5" x 46.8")
	Bucket : 1-100 x 840 mm (3.9" x 33.1")
	Blade : 2-100 x 236 mm (3.9" x 9.3")
Outrigger : 2-110 x 446 mm (4.3" x 7.6")	

DRIVES & BRAKES

4-wheel hydrostatic drive. Constant mesh, helical gear transmission provides 2 forward and reverse travel speeds.

Max. drawbar pull		8,500 kgf (18,740 lbf)
travel speed	1st	8 km/h (5.0 mph)
	2nd	30 km/h (18.6 mph)
Gradeability		35º (70 %)
Service Brake : - Independent dual brake, front and rear axle full hydraulic power brake. - Spring released and hydraulic applied wet type multiple disc brake. Parking Brake : - Spring applied and hydraulic released wet disc brake type in transmission.		

CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)
Engine throttle	Electric, Dial type

AXLE & WHEEL

Full floating front axle is supported by center pin for ocillation. It can be locked by ocillation lock cylinders. Rear axle is fixed on the lower chassis.

Tires	9.00-20-14PR, Dual(tube type)
(optional)	9.00-20, Dual(solid type)

SWING SYSTEM

Swing motor	Axial pistons motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc(pin lock type)
Swing speed	12.9 rpm

STEERING SYSTEM

Hydraulically actuated, orbitrol type steering system actuates on front wheels through the steering cylinders.

Min. turning radius	6,300 mm(20' 8")
---------------------	------------------

COOLANT & LUBRICANT CAPACITY

Refilling	liter	US gal	UK gal
Fuel tank	270.0	71.3	59.4
Engine coolant	17.5	4.6	3.8
Engine oil	15.3	4.0	3.4
Swing device - gear oil	2.5	0.7	0.5
Axle	Front	13.8	3.6
	Rear	16.0	4.2
Hydraulic system (including tank)		210.0	55.5
Hydraulic tank		124.0	32.8
		27.3	

UNDERCARRIAGE

Reinforced box-section frame is all-welded, low-stress. Dozer blade and outriggers are available. A pin-on design.

Dozer blade	A very useful addition for leveling and back filling or clean-up work.
Outrigger	Indicated for max. operation stability when digging and lifting. Can be mounted on the front/or the rear.

OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 4,600mm (15' 1") One-piece boom, 2,100mm (6' 11") arm, SAE heaped 0.58 m³ (0.76 yd³) backhoe bucket, lubricant, coolant, full fuel tank, hydraulic tank and the standard equipment.

MAJOR COMPONENT WEIGHT	
Upperstructure	4,680kg (10,320 lb)
Mono boom(with arm cylinder)	1,030kg (2,270 lb)


OPERATING WEIGHT	
Undercarriage	Mono boom
Rear dozer blade	13,700kg (30,200 lb)
Rear outrigger	14,100kg (31,090 lb)
Front outrigger and rear blade	14,700kg (32,410 lb)
Front blade and rear outrigger	14,700kg (32,410 lb)
Four outrigger	15,100kg (33,290 lb)

AIR CONDITIONING SYSTEM

The air condition system for the machine contains the fluorinated greenhouse gas with global warming potential of R134a. (Global Warming Potential : 1430) The system hold 0.75kg refrigerant consisting of a CO2 equivalent 1.07kg metric tonne. For more information, Please refer to the manual.

BUCKETS

All buckets are welded with high-strength steel.

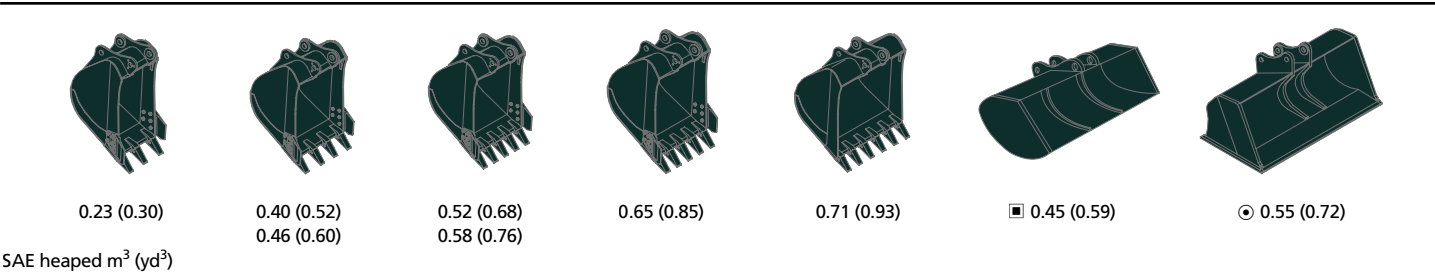

SAE heaped m³ (yd³)

Capacity m³ (yd³)		Width mm (in)		Weight kg (lb)	Recommendation mm (ft-in)			
SAE heaped	CECE heaped	Without sidecutters	With sidecutters		4.6 (15' 1") Boom			
					1.9 (6' 3") Arm	2.1 (6' 11") Arm	2.5 (8' 2") Arm	3.0 (9' 10") Arm
0.23 (0.30)	0.20(0.26)	520(20.5)	620(24.4)	335(740)	●	●	●	●
0.40 (0.52)	0.35(0.46)	750(29.5)	850(33.5)	410(900)	●	●	●	●
0.46 (0.60)	0.40(0.52)	840(33.1)	940(37.0)	435(960)	●	●	●	■
0.52 (0.68)	0.45(0.59)	915(36.0)	1,015(40.0)	460(1,010)	●	●	■	▲
0.58 (0.76)	0.50(0.65)	1,000(39.4)	1,100(43.3)	480(1,060)	●	■	■	▲
0.65 (0.85)	0.55(0.72)	1,105(43.5)	1,205(47.4)	500(1,100)	■	▲	▲	—
0.71 (0.93)	0.60(0.78)	1,190(46.9)	1,290(50.8)	540(1,190)	▲	▲	—	—
■ 0.45 (0.59)	0.40(0.52)	1,520(59.8)	1,620(63.8)	410(900)	●	●	■	—
◎ 0.55 (0.72)	0.45(0.59)	1,800(70.9)	1,900(74.8)	585(1,290)	■	▲	▲	—

■ Ditching bucket

◎ Heavy duty bucket

●: Applicable for materials with density of 2,000 kg /m³ (3,370 lb/ yd³) or less

■: Applicable for materials with density of 1,600 kg /m³ (2,700 lb/ yd³) or less

▲: Applicable for materials with density of 1,100 kg /m³ (1,850 lb/ yd³) or less

ATTACHMENT

Booms and arms are welded with a low-stress, full-box section design. 4.6m (15' 1") Boom and 1.9m (6' 3"), 2.1m (6' 11"), 2.5m (8' 2"), & 3.0m (9' 10") Arms are available.


DIGGING FORCE

Boom	Length	mm (ft-in)	4,600 (15' 1")				Remarks
	Weight	kg (lb)	1,030 (2,270)				
Arm	Length	mm (ft-in)	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")	
	Weight	kg (lb)	560 (1,230)	580 (1,280)	610 (1,340)	670 (1,480)	
Bucket digging force	SAE	kN	87.3 [94.8]	87.3 [94.8]	87.3 [94.8]	87.3[94.8]	[]: Power Boost
		kgf	8,900 [9,660]	8,900 [9,660]	8,900 [9,660]	8,900[9,660]	
		lbf	19,620 [21,300]	19,620 [21,300]	19,620 [21,300]	19,620[21,300]	
	ISO	kN	102 [110.8]	102 [110.8]	102 [110.8]	102[110.8]	
		kgf	10,400 [11,290]	10,400 [11,290]	10,400 [11,290]	10,400[11,290]	
		lbf	22,930 [24,890]	22,930 [24,890]	22,930 [24,890]	22,930[24,890]	
Arm crowd force	SAE	kN	76.5 [83.1]	73.6 [79.9]	62.8 [68.2]	55.9[60.7]	
		kgf	7,800 [8,470]	7,500 [8,140]	6,400[6,950]	5,700[6,190]	
		lbf	17,200 [18,670]	16,530 [17,950]	14,110[15,320]	12,570[13,640]	
	ISO	kN	80.4 [87.3]	77.5 [84.1]	65.7[71.4]	57.9[62.8]	
		kgf	8,200 [8,900]	7,900 [8,580]	6,700[7,270]	5,900[6,410]	
		lbf	18,080 [19,630]	17,420 [18,910]	14,770[16,040]	13,010[14,120]	

Note : Boom weight includes arm cylinder, piping, and pin
Arm weight includes bucket cylinder, linkage, and pin

Dimensions & Working Range

R140W-9S DIMENSIONS

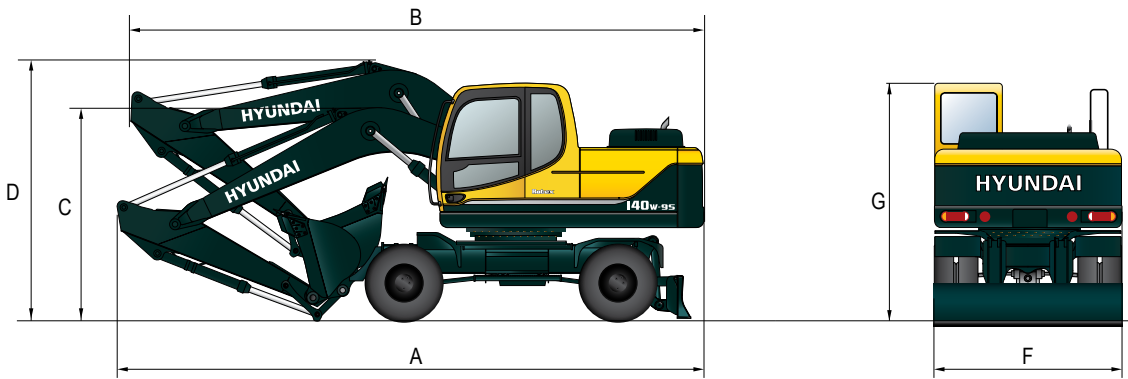


Unit : mm (ft-in)

Mono Boom	4,600(15' 1")			
Arm	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
A Overall length of shipping position	7,760 (25' 6")	7,820 (25' 8")	7,770 (25' 6")	7,830 (25' 8")
B Overall length of traveling position	7,750 (25' 5")	7,760 (25' 6")	7,690 (25' 3")	7,710 (25' 4")
C Height of attachment(shipping position)	2,760 (9' 1")	2,860 (9' 5")	2,810 (9' 3")	3,100 (10' 2")
D Height of attachment(traveling position)	3,500 (11' 6")	3,500 (11' 6")	3,620 (11' 11")	3,600 (11' 10")
F Overall width	2,500 (8' 2")	2,500 (8' 2")	2,500 (8' 2")	2,500 (8' 2")
G Height of cabin	3,140 (10' 4")	3,140 (10' 4")	3,140 (10' 4")	3,140 (10' 4")

R140W-9S WORKING RANGE


Unit : mm (ft-in)

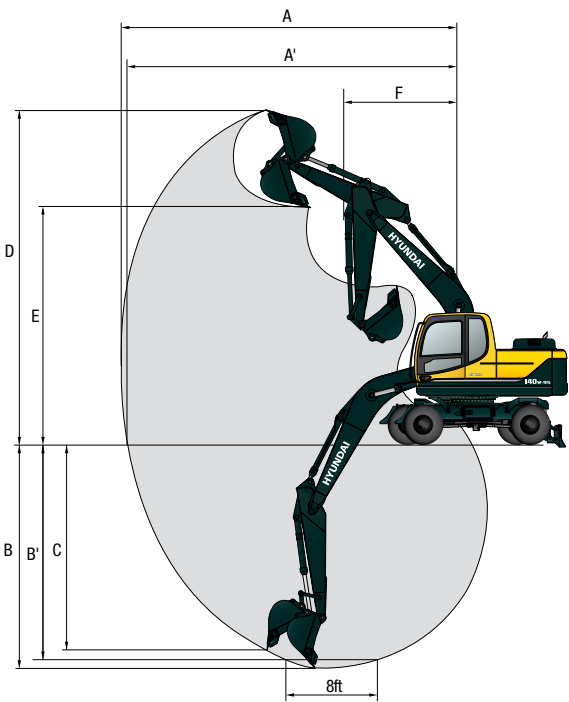


Boom length	4,600 (15' 1")			
Arm length	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
A Max. digging reach	7,750 (25' 5")	7,920 (26' 0")	8,320 (27' 4")	8,790 (28' 10")
A' Max. digging reach on ground	7,530 (24' 8")	7,700 (25' 3")	8,120 (26' 8")	8,590 (28' 2")
B Max. digging depth	4,650 (15' 3")	4,850 (15' 11")	5,250 (17' 3")	5,750 (18' 10")
B' Max. digging depth (8' level)	4,390 (14' 5")	4,600 (15' 1")	5,040 (16' 6")	5,570 (18' 3")
C Max. vertical wall digging depth	4,350 (14' 3")	4,460 (14' 8")	5,030 (16' 6")	5,550 (18' 3")
D Max. digging height	8,400 (27' 7")	8,470 (27' 9")	8,790 (28' 10")	9,070 (29' 9")
E Max. dumping height	5,960 (19' 7")	6,040 (19' 10")	6,350 (20' 10")	6,620 (21' 9")
F Min. swing radius	2,620 (8' 7")	2,670 (8' 10")	2,650 (8' 8")	2,670 (8' 9")

Undercarriage


R140W-9S WITH REAR DOZER

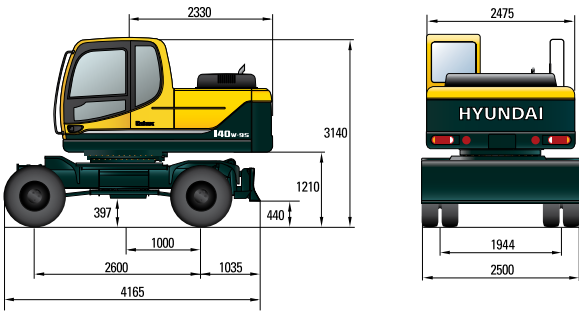


R140W-9S WITH REAR OUTRIGGER

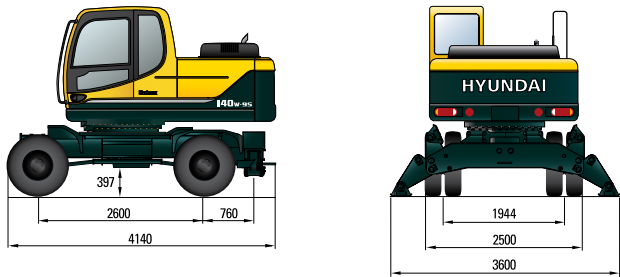


R140W-9S WITH REAR DOZER AND FRONT OUTRIGGER

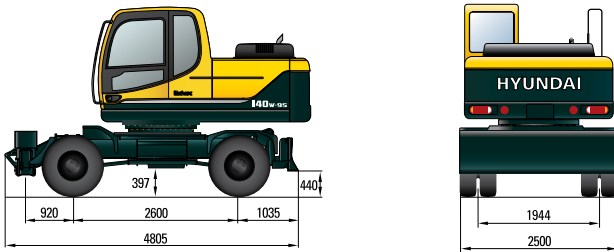

R140W-9S WITH REAR AND FRONT OUTRIGGER

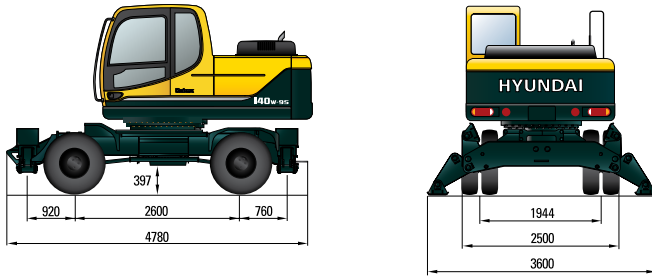











R140W-9S WITH REAR OUTRIGGER AND FRONT DOZER

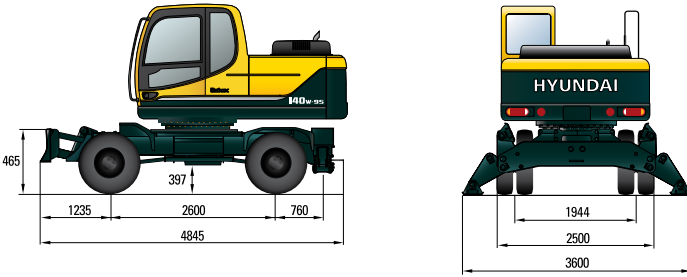

Lifting Capacity

R140W-9S MONO BOOM











Boom : 4.6 m (15' 1") / Arm : 1.9 m (6' 3") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m	kg					*3,350	*3,350			*3,200	2,080	6.22
(20 ft)	lb					*7,390	*7,390			*7,050	4,590	(20.4)
4.5 m	kg					*3,740	3,550	*2,860	2,120	*3,310	1,610	7.05
(15 ft)	lb					*8,250	7,830	*6,310	4,670	*7,300	3,550	(23.1)
3.0m	kg			*7,070	6,400	*4,710	3,330	*3,900	2,050	3,370	1,420	7.42
(10 ft)	lb			*15,590	14,110	*10,380	7,340	*8,600	4,520	7,430	3,130	(24.3)
1.5 m	kg			*7,620	5,740	*5,750	3,090	*4,340	1,960	3,320	1,380	7.42
(5 ft)	lb			*16,800	12,650	*12,680	6,810	*9,570	4,320	7,320	3,040	(24.3)
Ground	kg			*8,960	5,590	*6,340	2,940	*4,600	1,890	3,590	1,480	7.06
Line	lb			*19,750	12,320	*13,980	6,480	*10,140	4,170	7,910	3,260	(23.2)
-1.5 m	kg	*7,690	*7,690	*9,450	5,620	*6,250	2,920			*3,860	1,830	6.24
(-5 ft)	lb	*16,950	*16,950	*20,830	12,390	*13,780	6,440			*8,510	4,030	(20.5)
-3.0 m	kg			*7,750	5,800	*5,020	3,030					
(-10 ft)	lb			*17,090	12,790	*11,070	6,680					

Lifting Capacity

R140W-9S MONO BOOM











Boom : 4.6 m (15' 1") / Arm : 2.1 m (6' 11") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m	kg					*3,130	*3,130			*3,050	1,950	6.43
(20 ft)	lb					*6,900	*6,900			*6,720	4,300	(21.1)
4.5 m	kg					*3,540	*3,540	*3,210	2,120	*3,160	1,520	7.23
(15 ft)	lb					*7,800	*7,800	*7,080	4,670	*6,970	3,350	(23.7)
3.0m	kg			*6,620	6,450	*4,510	3,310	*3,770	2,040	3,230	1,340	7.59
(10 ft)	lb			*14,590	14,220	*9,940	7,300	*8,310	4,500	7,120	2,950	(24.9)
1.5 m	kg			*8,650	5,730	*5,580	3,060	*4,230	1,930	3,180	1,300	7.59
(5 ft)	lb			*19,070	12,630	*12,300	6,750	*9,330	4,250	7,010	2,870	(24.9)
Ground	kg			*9,090	5,510	*6,240	2,900	*4,540	1,860	3,420	1,390	7.24
Line	lb			*20,040	12,150	*13,760	6,390	*10,010	4,100	7,540	3,060	(23.8)
-1.5 m	kg	*7,380	*7,380	*9,530	5,530	*6,240	2,860			*3,760	1,700	6.45
(-5 ft)	lb	*16,270	*16,270	*21,010	12,190	*13,760	6,310			*8,290	3,750	(21.2)
-3.0 m	kg	*11,710	*11,710	*7,990	5,690	*5,240	2,950					
(-10 ft)	lb	*25,820	*25,820	*17,610	12,540	*11,550	6,500					

Lifting Capacity

R140W-9S MONO BOOM

Boom : 4.6 m (15' 1") / Arm : 2.5 m (8' 2") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m	kg									*2,820	1,700	6.92
(20 ft)	lb									*6,220	3,750	(22.7)
4.5 m	kg					*3,110	*3,110	*2,980	2,150	*2,880	1,360	7.66
(15 ft)	lb					*6,860	*6,860	*6,570	4,740	*6,350	3,000	(25.1)
3.0m	kg			*5,700	*5,700	*4,110	3,360	*3,500	2,050	*2,930	1,200	8.00
(10 ft)	lb			*12,570	*12,570	*9,060	7,410	*7,720	4,520	*6,460	2,650	(26.2)
1.5 m	kg			*8,610	5,850	*5,270	3,080	*4,030	1,930	2,900	1,160	8.00
(5 ft)	lb			*18,980	12,900	*11,620	6,790	*8,880	4,250	6,390	2,560	(26.2)
Ground	kg	*3,820	*3,820	*9,000	5,500	*6,070	2,890	*4,430	1,830	3,090	1,240	7.67
Line	lb	*8,420	*8,420	*19,840	12,130	*13,380	6,370	*9,770	4,030	6,810	2,730	(25.2)
-1.5 m	kg	*6,470	*6,470	*9,740	5,460	*6,260	2,820	*4,470	1,800	*3,510	1,480	6.94
(-5 ft)	lb	*14,260	*14,260	*21,470	12,040	*13,800	6,220	*9,850	3,970	*7,740	3,260	(22.8)
-3.0 m	kg	*9,750	*9,750	*8,560	5,580	*5,620	2,870			*3,480	2,150	22.8
(-10 ft)	lb	*21,500	*21,500	*18,870	12,300	*12,390	6,330			*7,670	4,740	(18.5)

1. Lifting capacity is based on ISO 10567.













2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The load point is a hook located on the back of the bucket.

4. (*) indicates the load limited by hydraulic capacity.

Lifting Capacity

R140W-9S MONO BOOM

Boom : 4.6 m (15' 1") / Arm : 3.0 m (9' 10") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius										At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
														m (ft)
6.0 m	kg							*2,100	*2,100			*2,570	1,480	7.46
(20 ft)	lb							*4,630	*4,630			*5,670	3,260	(24.5)
4.5 m	kg							*2,710	2,200			*2,590	1,210	8.14
(15 ft)	lb							*5,970	4,850			*5,710	2,670	(26.7)
3.0m	kg					*3,580	3,450	*3,170	2,090	*1,780	1,350	*2,640	1,080	8.46
(10 ft)	lb					*7,890	7,610	*6,990	4,610	*3,920	2,980	*5,820	2,380	(27.8)
1.5 m	kg			*7,700	6,080	*4,840	3,150	*3,770	1,960	*2,190	1,290	2,640	1,040	8.46
(5 ft)	lb			*16,980	13,400	*10,670	6,940	*8,310	4,320	*4,830	2,840	5,820	2,290	(27.8)
Ground	kg	*3,780	*3,780	*9,530	5,580	*5,830	2,920	*4,280	1,840	*1,820	1,250	2,780	1,100	8.15
Line	lb	*8,330	*8,330	*21,010	12,300	*12,850	6,440	*9,440	4,060	*4,010	2,760	6,130	2,430	(26.7)
-1.5 m	kg	*5,830	*5,830	*9,890	5,450	*6,250	2,810	*4,490	1,780			3,210	1,280	7.48
(-5 ft)	lb	*12,850	*12,850	*21,800	12,020	*13,780	6,190	*9,900	3,920			7,080	2,820	(24.5)
-3.0 m	kg	*8,470	*8,470	*9,150	5,500	*5,950	2,820	*3,320	1,810			*3,390	1,750	6.31
(-10 ft)	lb	*18,670	*18,670	*20,170	12,130	*13,120	6,220	*7,320	3,990			*7,470	3,860	(20.7)
-4.5 m	kg			*6,890	5,740									
(-15 ft)	lb			*15,190	12,650									

1. Lifting capacity is based on ISO 10567.

2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The load point is a hook located on the back of the bucket.

4. (*) indicates the load limited by hydraulic capacity.